

HALO Smart Sensors & HALO Cloud

Where safety and personal privacy meet

Ensuring the safety of individuals and organizations is essential, including where visual and audio recording is not permitted due to privacy concerns. These areas pose a unique security challenge as they are often targeted to engage in prohibited or unsafe activities. How do you help keep every area of a building safe?

Meet the HALO Smart Sensor, an all-in-one intelligent device that helps keep buildings safe by accurately detecting vaping, health and safety events. Not only does the device help with the safety of privacy rooms by not using visual or audio recording, but it also can detect air quality and anomalies that go unnoticed by security cameras.



Features



All-in-one, intelligent device

Accurately detect health, safety and vaping anomalies, and keep track of occupancy. Plus, visually identify the event that triggered a HALO Smart Sensor through the pre-programmed multicolored LEDs that illuminate the device.



Integrations

As a VMS-agnostic smart device, the HALO Smart Sensor works with your existing security system, saving time and costs when installing your additional layer of security.



Real-time notifications

Receive real-time alerts directly within your video management system (VMS) so you can respond faster and mitigate potential threats.



Keep all areas safe

HALO Smart Sensors detect various anomalies, including vaping, vaping with THC, aggression, motion, gunshots and more, all while protecting the privacy of individuals by not using audio or visual recording.



Easy and quick installation

Keep your aesthetics pleasing with a small, lightweight and discreet device. Benefit from an easy surface-mount installation with the ability to power two units with a single cable run.



Gain insights with HALO Cloud

Efficiently allocate resources and quickly respond to events by gaining valuable insights with trend analysis and customized reports. Stay one step ahead with real-time notifications delivered to your email and mobile devices.

These products are available in select countries only. Contact your local [Pelco sales representative](#) today.

Specifications

Mechanical	
Dimensions	140mm x 51mm; 5.5" x 2"
Weight	0.365 kgs; 0.8 lbs

Environmental	
Operating Temperature	Min: 0C (32F), Max: 50C (122F)
Relative Humidity	0 to 90% (non-condensing)

Electrical	
Power	PoE (IEEE 802.3af Class 3 Compliance) 11W
Relays/Outputs	1, Normally Closed, 48VDC at 1 amp

Image ¹	
Live Image Resolution	1024 x 768
Frame Rate	1 FPS
Video Compression	MJPEG or H.264

¹ Image display of sensor readings only

Components	
Audio	MEMS Microphones (2) [Audio Analysis Only] No Recording of Live Stream
Speaker	Alarm Condition, Pre-Recorded Files, Programmable WAV Files
Status Light	Alarm Condition, Multi-Color, Programmable
Alarm Triggers	Air Quality Index (AQI), Health Index, Vape, Vape THC, Aggression, Gunshot, Spoken Keyword, Tamper, Particulates, Carbon Dioxide Calibrated, Total Volatile Organic Compounds, Carbon Monoxide, Temperature/Humidity, Light Level, Sound Levels, Building Health, Motion Detection, Occupancy (People Counter) ² , Panic Button


² Only available on HALO 3C-PC and HALO-SENSOR-3C-PC.

Network	
Ethernet	10/100BASE-T, RJ45 Connector, CAT5e Cabling
Protocols	BACnet, RTSP, TCP/IP, UDP, IPV4/V6, HTTP, HTTPS, DHCP, ARP, Bonjour, Wireless Connectivity
Maximum User Connections	Live MJPEG or H.264 Stream, 8 Users

Peripherals	
USB Port	USB 2.0
Ethernet Port	Ethernet (RJ45) for Tablet

Certifications	
Certifications/Directives	UL, CUL, CE, RoHS, FCC, WEEE, NRCS, ACMA, RCA, UKCA, VCCI
Tamper Detection	IK8 rated, vandal-proof housing with Tamper Alert
Warranty	5 years

Outline Dimensions

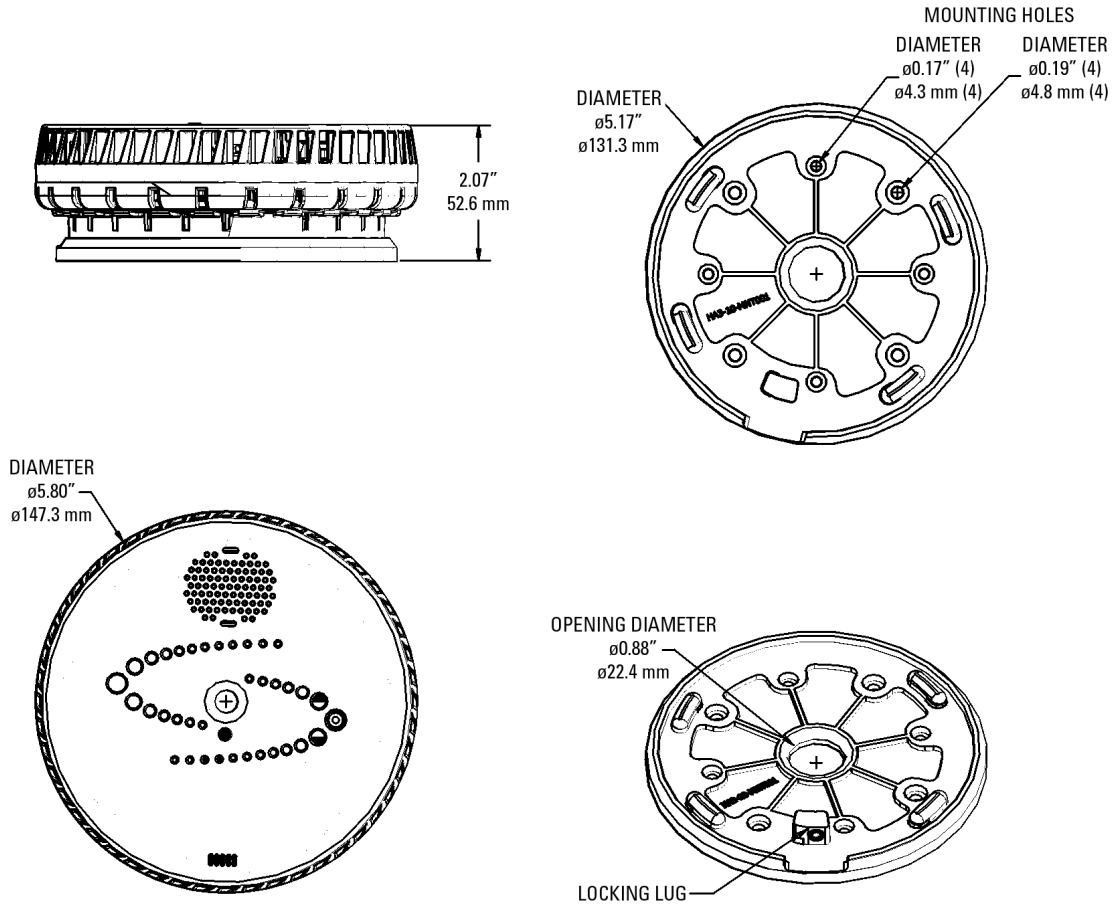

Ordering Information

For US and Canada

Description	
HALO-3C	HALO IoT Smart Sensor 3C
HALO-3C-PC	HALO IoT Smart Sensor 3C PC with Occupancy and People Counting
HALO-BACKBOX	Back box for the HALO 3C or HALO 3C-PC. Required anytime there is a wire mold or conduit connection to the HALO.
iPANIC-V2	Panic button for the HALO 3C or HALO 3C-PC, functional only with HALO Cloud
HALO-LIC-1YR	1-year subscription to HALO Cloud. End user information is required.
HALO-LIC-3YR	3-year subscription to HALO Cloud. End user information is required.
HALO-LIC-5YR	5-year subscription to HALO Cloud. End user information is required.
HALO-LIC-10YR	10-year subscription to HALO Cloud. Includes a 10-year warranty extension for the HALO device. End user information is required.
HALO-3C-DISPLAY-NP	For demonstration purposes only. Includes HALO 3C, display stand, and travel case. The following parts are not included with the kit, but highly recommended: Panic button, PoE Injector, and HALO Cloud demo license.

For all other countries

Description	
HALO-SENSOR-3C	HALO IoT Smart Sensor 3C
HALO-SENSOR-3C-PC	HALO IoT Smart Sensor 3C PC with Occupancy and People Counting
HALO-SENSOR-BACKBOX	Back box for the HALO 3C or HALO 3C-PC. Required anytime there is a wire mold or conduit connection to the HALO.
HALO-SENSOR-PANIC-BUTTON-V2	Panic button for the HALO 3C or HALO 3C-PC, functional only with HALO Cloud
HALO-SENSOR-CLOUD-1YR	1-year subscription to HALO Cloud. End user information is required.
HALO-SENSOR-CLOUD-3YR	3-year subscription to HALO Cloud. End user information is required.
HALO-SENSOR-CLOUD-5YR	5-year subscription to HALO Cloud. End user information is required.
HALO-SENSOR-CLOUD-10YR	10-year subscription to HALO Cloud. Includes a 10-year warranty extension for the HALO device. End user information is required.
HALO-3C-DISPLAY-NP	For demonstration purposes only. Includes HALO 3C, display stand, and travel case. The following parts are not included with the kit, but highly recommended: Panic button, PoE Injector and HALO Cloud demo license.

Support

Learn more and find additional documentation at pelco.com or email support@pelco.com for specific product support.



Nov 2024 | | Rev2

© 2024, Motorola Solutions, Inc. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice.